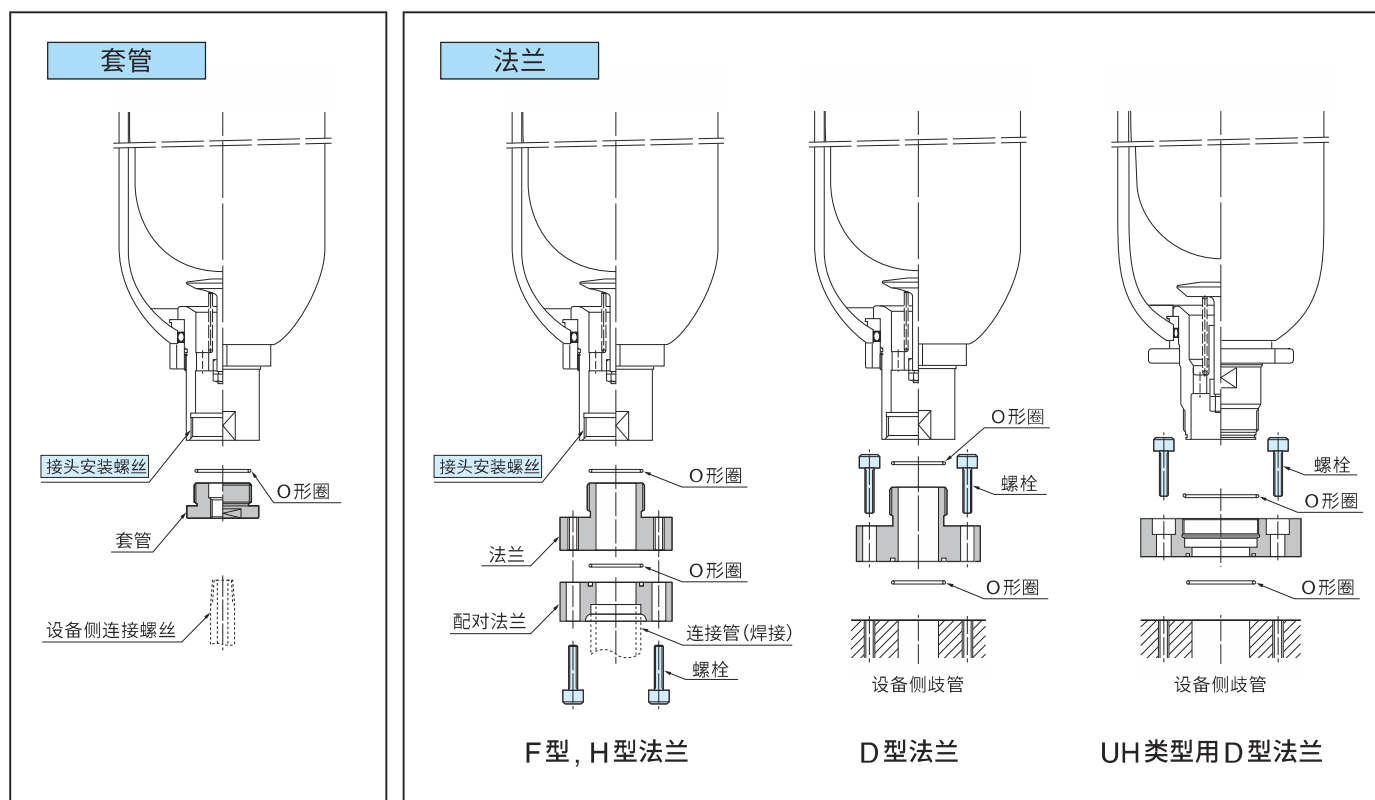


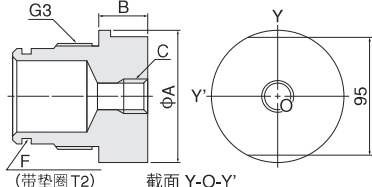


13. 液体端接口

为了方便将蓄能器与设备机械连接，还备有各尺寸套管、法兰，因此请与蓄能器一同订购。
请选择与适用蓄能器螺丝配件一致的套管与法兰。



① 套管（带O形圈、垫圈）





标识 符号	设备端 连接螺丝 尺寸	适用蓄能器 (螺丝配件)	形状	尺寸 mm			F部适用 O形圈	购买单品	
				A	B	C	〔一般矿物油类 工作油用〕	型号	产品编号
T03	R3/8	PA (A类型)		32	8	Rc3/8	JIS B2401-1 OR NBR-90 P22-N	PAL101-049	EB1701 Z1
T04	R1/2	AL1, 2.4ℓ (G3/4)		36	30	Rc1/2		PAL101-050	EB1702 Z1
T06	R3/4					Rc3/4		PAL101-051	EB1703 Z1
T04	R1/2	AL4, 5ℓ (G11/4)		50	10	Rc1/2	AS568-222 旧AN6227 #27 (JIS NBR-90)	PAL101-052	EB1704 Z1
T06	R3/4					Rc3/4		PAL101-053	EB1705 Z1
T08	R 1					Rc1		PAL101-054	EB1706 Z1
T04	R1/2	PA (B, C类型) AT10~60ℓ (G2)		76	13	Rc1/2	JIS B2401-1 OR NBR-90 G55-N	PAT101-028	EB1707 Z1
T06	R3/4					Rc3/4		PAT101-029	EB1708 Z1
T08	R1					Rc1		PAT101-030	EB1709 Z1
T10	R1 1/4					Rc1 1/4		PAT101-031	EB1710 Z1
T06	R3/4	AT-HF, MH AT80~160ℓ (G3)		108	40	Rc3/4	AS568-336 旧AN6227 #39 (JIS NBR-70-1)	PAT101-032	EB1711 Z1
T08	R1					Rc1		PAT101-033	EB1712 Z1
T10	R1 1/4					Rc1 1/4		PAT101-034	EB1713 Z1
T12	R1 1/2					Rc1 1/2		PAT101-035	EB1714 Z1

购买单品时 ●请指定型号与产品编号。材质：钢（标准材质）
●可适用不锈钢材质。

② 法兰


F型法兰套装（配对法兰、螺栓、O形圈、垫圈 套装）

最高使用压力 21MPa

标识 符号	连接管 口径	配对法兰 JIS B2291	适用蓄能器 (螺丝配件)	形状 (适用O形圈：一般矿物油类工作油用)	尺寸 mm					购买法兰套装单品		
					A	B	C	D	E	型号	产品编号	
F04	15A (1/2B)	SSA15	AL1, 2.4 ℓ (G3/4)		75	38	16	36	M10	PAL101-056	EB1715 Z1	
F06	20A (3/4B)	SSA20					20	40		PAL101-057	EB1716 Z1	
F06	20A (3/4B)	SSA20	AL4, 5 ℓ (G1 1/4)		75	38	20	40	M10	PAL101-058	EB1717 Z1	
F08	25A (1B)	SSA25			108	43	25	48	M12	PAL101-059	EB1718 Z1	
F06	20A (3/4B)	SSA20	AT10~60 ℓ AT-SH类型 (G2)		80	38	20	40	M10	PAT101-036	EB1719 Z1	
F08	25A (1B)	SSA25			108		25	48	M12	PAT101-037	EB1720 Z1	
F10	32A (1 1/4B)	SSA32					30	56	M12	PAT101-038	EB1721 Z1	
F12	40A (1 1/2B)	SSA40			128	40	37	65	M16	PAT101-039	EB1722 Z1	
F12	40A (1 1/2B)	SSA40	AT-HF, MH AT80~160 ℓ (G3)		128	36	37.5	65	M16	PAT101-101	EB1742 Z1	
F16	50A (2B)	SSA50			138		47.5	73		PAT101-102	EB1743 Z1	
F20	65A (2 1/2B)	SSA65			178	45	60	92	M20	PAT101-103	EB1744 Z1	
F24	80A (3B)	SSA80			198		71	103	M22	PAT101-104	EB1745 Z1	





购买单品时 ● 请指定型号与产品编号。材质：钢（标准材质）
● 可适用不锈钢材质。

【参考】JIS B 2291 配对法兰尺寸表

标识 符号	公称	形状	尺寸 mm							H部适用O形圈 JIS B2401-1 [一般矿物油类工作油用]
			A	B	C	D	E	F	G	
F04	SSA15		54	22	16	36	11	22.2	11	OR NBR-90 G25-N
F06	SSA20		58	22	20	40	11	27.7	12	OR NBR-90 G30-N
F08	SSA25		68	28	25	48	13	34.5	14	OR NBR-90 G35-N
F10	SSA32		76	28	31.5	56	13	43.2	16	OR NBR-90 G40-N
F12	SSA40		92	36	37.5	65	18	49.1	18	OR NBR-90 G50-N
F16	SSA50		100	36	47.5	73	18	61.1	20	OR NBR-90 G60-N
F20	SSA65		128	45	60	92	22	77.1	22	OR NBR-90 G75-N
F24	SSA80		140	45	71	103	24	90	25	OR NBR-90 G85-N


H型法兰套装（配对法兰、螺栓、O形圈、垫圈 套装）

最高使用压力 35MPa

标识 符号	连接管 口径	适用蓄能器 (螺丝配件)	形状 (适用O形圈：一般矿物油类工作油用)	尺寸 mm					购买法兰套装单品	
				A	B	C	D	E	型号	产品编号
H04	15A (1/2B)	AL1, 2.4ℓ (G3/4)	 O形圈：JIS B 2401-1 OR NBR-90 P22-N	86	42	16	44	M12	PAL101-060	EB1726 Z1
H06	20A (3/4B)			93	42	20	49	M12	PAL101-061	EB1727 Z1
H06	20A (3/4B)	AL4, 5ℓ (G1 1/4)	 O形圈：AS568-222 (旧 AN6227#27) (JIS NBR-90)	93	42	20	49	M12	PAL101-062	EB1728 Z1
H08	25A (1B)			108	42	25	57	M16	PAL101-063	EB1729 Z1
H06	20 (3/4B)	AT10~60ℓ AT-SH (G2)	 O形圈：JIS B 2401-1 OR NBR-90 G55-N	93	42	20	49	M12	PAT101-043	EB1730 Z1
H08	25A (1B)			108	42	25	57	M16	PAT101-044	EB1731 Z1
H10	32A (1 1/4B)			118	42	30	65	M16	PAT101-045	EB1732 Z1
H12	40A (1 1/2B)			138	44	37	75	M20	PAT101-046	EB1733 Z1
H16	50A (2B)	AT-HF, MH AT80~160ℓ (G3)	 O形圈：AS568-336 (旧 AN6227#39) (JIS NBR-70-1) (带垫圈 T2)	158	45	47.5	88	M20	PAT101-116	EB1761 Z1
H20	65A (2 1/2B)			198	55	60	110	M24	PAT101-117	EB1762 Z1
H24	80A (3B)			228	55	71	124	M30	PAT101-118	EB1763 Z1






购买单品时 ●请指定型号与产品编号。材质：钢（标准材质）
●可适用不锈钢材质。

配对法兰尺寸表

标识 符号	连接管口径	形状	尺寸 mm							H部适用O形圈 JIS B2401-1 [一般矿物油类工作油用]
			A	B	C	D	E	F	G	
H04	15A (1/2B)		74	25	16	44	14	22.2	10	OR NBR-90 G25-N
H06	20A (3/4B)		78	25	20	49	14	27.7	17	OR NBR-90 G30-N
H08	25A (1B)		90	32	25	57	18	34.5	19	OR NBR-90 G35-N
H10	32A (1 1/4B)		100	32	30	65	18	43.2	20	OR NBR-90 G40-N
H12	40A (1 1/2B)		118	40	38	75	22	49.1	23	OR NBR-90 G50-N
H16	50A (2B)		134	45	47.5	88	22	61.1	25	OR NBR-90 G60-N
H20	65A (2 1/2B)		170	55	60	110	26	77.1	28	OR NBR-90 G75-N
H24	80A (3B)		186	55	71	124	32	90	31	OR NBR-90 G85-N

D型法兰套装 歧管直接安装用（螺栓、O形圈、垫圈 套装）

最高使用压力 25MPa

标识 符号	连接管 口径	适用蓄能器 (螺丝配件)	形 状 (适用O形圈：一般矿物油类工作油用)	尺寸 mm					G部适用O形圈 JIS B2401-1 [一般矿物油类 工作油用]	购买法兰套装单品	
				A	B	C	D	E		型号	产品编号
D04	15A (1/2B)	AL1, 2.4ℓ (G3/4)		68	25	16	48	11	OR NBR-90 G25-N	PAL101-112	EB1746 Z1
D06	20A (3/4B)					20			OR NBR-90 G30-N	PAL101-113	EB1747 Z1
D06	20A (3/4B)	AL4, 5ℓ (G1 1/4)		76	28	20	56	13	OR NBR-90 G30-N	PAL101-114	EB1748 Z1
D08	25A (1B)					25			OR NBR-90 G35-N	PAL101-115	EB1749 Z1
D10	32A (1 1/4B)	AT10~60ℓ AT-SH类型 (G2)		100	36	32	73	18	OR NBR-90 G40-N	PAT101-107	EB1752 Z1
D12	40A (1 1/2B)					38			OR NBR-90 G50-N	PAT101-108	EB1753 Z1
D16	50A (2B)	AT-HF, MH AT80~160ℓ (G3)		140	45	48	103	24	OR NBR-90 G60-N	PAT101-110	EB1755 Z1
D20	65A (2 1/2B)					60			OR NBR-90 G75-N	PAT101-111	EB1756 Z1
D16	50A (2B)	AT-UH (M105x2) 公螺丝		140	45	48	103	22	OR NBR-90 G60-N	PAT101-113	EB1759 Z1
D24	80A (3B)			155	50	82	112		OR NBR-90 G90-N	PAT101-114	EB1760 Z1

购买单品时 ●请指定型号与产品编号。材质：钢（标准材质）
●可适用不锈钢材质。