


THIN SHEET NUT-INSERT

SSR SERIES

- Knurled Body

Material: Stainless Steel A2

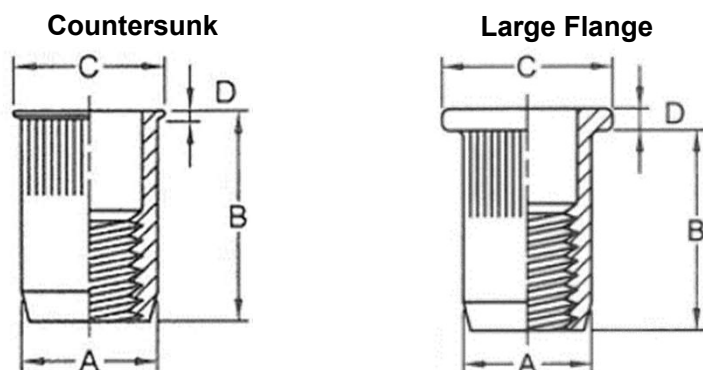

▼COUNTERSUNK

Unit: mm

ITEM NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE +0.1/-0	A Max.	B +0.5/-0	C ±0.3	D +0.3/-0
SSR-SM325	M3x0.5	0.5~2.0	5.00	5.00	9.00	6.00	0.50
SSR-SM425	M4x0.7	0.5~2.5	6.00	6.00	11.00	7.00	0.50
SSR-SM435		2.5~4.0	6.00	6.00	12.50	7.00	0.50
SSR-SM525	M5x0.8	0.5~3.0	7.00	7.00	12.00	8.00	0.50
SSR-SM535		3.0~4.5	7.00	7.00	13.50	8.00	0.50
SSR-SM625	M6x1.0	0.5~3.0	9.00	9.00	14.00	10.00	0.50
SSR-SM640		3.0~5.0	9.00	9.00	16.00	10.00	0.50
SSR-SM825	M8x1.25	0.5~3.0	11.00	11.00	16.00	12.00	0.50
SSR-SM840		3.0~5.5	11.00	11.00	18.50	12.00	0.50
SSR-SM1025	M10x1.5	1.0~3.5	13.00	13.00	19.00	14.20	0.80
SSR-SM1040		3.5~6.0	13.00	13.00	21.50	14.20	0.80

▼LARGE FLANGE

Unit: mm

ITEM NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE +0.1/-0	A Max.	B ±0.3	C +0/-0.5	D ±0.1
SSR-LM325	M3x0.5	0.3~2.0	5.00	5.00	9.00	8.00	0.80
SSR-LM425	M4x0.7	0.3~2.5	6.00	6.00	11.00	9.00	1.00
SSR-LM435		2.5~4.0	6.00	6.00	12.50	9.00	1.00
SSR-LM525	M5x0.8	0.3~3.0	7.00	7.00	12.00	10.00	1.00
SSR-LM535		3.0~4.5	7.00	7.00	13.50	10.00	1.00
SSR-LM625	M6x1.0	0.5~3.0	9.00	9.00	14.00	12.00	1.50
SSR-LM640		3.0~5.0	9.00	9.00	16.00	12.00	1.50
SSR-LM825	M8x1.25	0.5~3.0	11.00	11.00	16.00	15.00	1.50
SSR-LM840		3.0~5.5	11.00	11.00	18.50	15.00	1.50
SSR-LM1025	M10x1.5	1.0~3.5	13.00	13.00	19.00	17.00	2.00
SSR-LM1040		3.5~6.0	13.00	13.00	21.50	17.00	2.00
SSR-LM1240	M12x1.75	1.0~4.0	16.00	16.00	23.20	22.00	2.00

EDC 金開股份有限公司 Energetic Development Corp.

Head office: 5F, No. 1, Lane 50, Sec. 3, Nan Kang Rd., Taipei 115, Taiwan

Tel: (02) 27881122 Fax: (02) 27881480 Website: www.edccorp.com.tw Email: edc@edccp.com