


ISO相当 一般工業用シリーズ (固定用)

材料	JIS記号	NBR-70-1
	旧JIS記号*	1種A
	NOK記号	A305

*旧JIS: JIS B 2401-2005

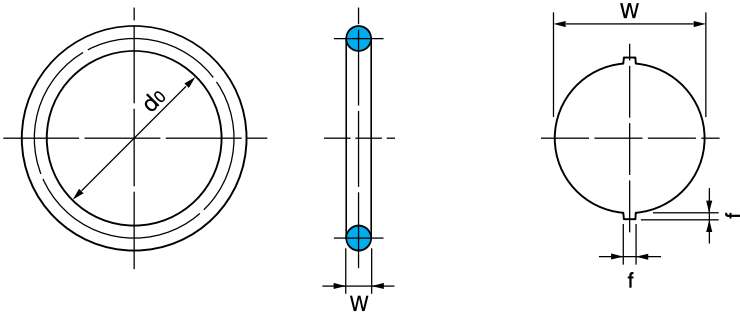

(単位: mm)

NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法				NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法					
		太さ W		内 径 d ₀				バリ寸法 f	太さ W		内 径 d ₀		バリ寸法 f
CO 7200 A	A 0018 G	1.8	±0.08	1.80	±0.13	0.1以下	CO 7242 A	B 0300 G	2.65	±0.09	30.0	±0.29	0.12以下
CO 7201 A	A 0020 G			2.00			CO 7243 A	B 0315 G			31.5	±0.31	
CO 7202 A	A 0022 G			2.24			CO 7244 A	B 0325 G			32.5	±0.32	
CO 7203 A	A 0025 G			2.50			CO 7245 A	B 0335 G			33.5	±0.32	
CO 7204 A	A 0028 G			2.80			CO 7246 A	B 0345 G			34.5	±0.33	
CO 7205 A	A 0031 G			3.15	±0.14		CO 7247 A	B 0355 G			35.5	±0.34	
CO 7206 A	A 0035 G			3.55			CO 7248 A	B 0365 G			36.5	±0.35	
CO 7207 A	A 0037 G			3.75			CO 7249 A	B 0375 G			37.5	±0.36	
CO 7208 A	A 0040 G			4.00			CO 7250 A	B 0387 G			38.7	±0.37	
CO 1012 A	A 0045 G			4.50			CO 7251 A	C 0180 G	18.0	±0.21			
CO 7209 A	A 0048 G			4.87	±0.15		CO 7252 A	C 0190 G	19.0	±0.22			
CO 7210 A	A 0050 G			5.00			CO 7253 A	C 0200 G	20.0	±0.22			
CO 7211 A	A 0051 G			5.15			CO 7254 A	C 0212 G	21.2	±0.23			
CO 7212 A	A 0053 G			5.30			CO 7255 A	C 0224 G	22.4	±0.24			
CO 6868 A	A 0056 G			5.60			CO 7256 A	C 0236 G	23.6	±0.24			
CO 3026 A	A 0060 G			6.00	±0.16		CO 7257 A	C 0250 G	25.0	±0.25			
CO 7213 A	A 0063 G			6.30			CO 7258 A	C 0258 G	25.8	±0.26			
CO 7038 A	A 0067 G			6.70			CO 7259 A	C 0265 G	26.5	±0.26			
CO 7214 A	A 0069 G			6.90			CO 7260 A	C 0280 G	28.0	±0.28			
CO 7215 A	A 0071 G			7.10			CO 7261 A	C 0300 G	30.0	±0.29			
CO 7216 A	A 0075 G			7.50	±0.17		CO 7262 A	C 0315 G	31.5	±0.31			
CO 7217 A	A 0080 G			8.00			CO 7263 A	C 0325 G	32.5	±0.32			
CO 7218 A	A 0085 G			8.50			CO 7264 A	C 0335 G	33.5	±0.32			
CO 7219 A	A 0087 G			8.75			CO 7265 A	C 0345 G	34.5	±0.33			
CO 1061 A	A 0090 G			9.00			CO 7266 A	C 0355 G	35.5	±0.34			
CO 7221 A	A 0095 G			9.50	±0.18		CO 7267 A	C 0365 G	36.5	±0.35			
CO 7222 A	A 0100 G			10.0			CO 7268 A	C 0375 G	37.5	±0.36			
CO 7223 A	A 0106 G			10.6			CO 7269 A	C 0387 G	38.7	±0.37			
CO 7224 A	A 0112 G			11.2			CO 7270 A	C 0400 G	40.0	±0.38			
CO 1109 A	A 0118 G			11.8			CO 7271 A	C 0412 G	41.2	±0.39			
CO 7225 A	A 0125 G			12.5	±0.19		CO 7272 A	C 0425 G	42.5	±0.40			
CO 7226 A	A 0132 G			13.2			CO 7273 A	C 0437 G	43.7	±0.41			
CO 3441 A	A 0140 G			14.0			CO 7274 A	C 0450 G	45.0	±0.42			
CO 6822 A	A 0150 G			15.0			CO 7275 A	C 0462 G	46.2	±0.43			
CO 6861 A	A 0160 G			16.0			CO 7276 A	C 0475 G	47.5	±0.44			
CO 7227 A	A 0170 G			17.0	±0.21		CO 7277 A	C 0487 G	48.7	±0.45			
CO 7228 A	B 0140 G	2.65	±0.09	14.0	±0.19		0.12以下	CO 7278 A	C 0500 G	50.0	±0.46		
CO 7229 A	B 0150 G			15.0				±0.20	CO 7279 A	C 0515 G	51.5	±0.47	
CO 7230 A	B 0160 G			16.0				±0.20	CO 7280 A	C 0530 G	53.0	±0.48	
CO 7231 A	B 0170 G			17.0				±0.21	CO 7281 A	C 0545 G	54.5	±0.50	
CO 7232 A	B 0180 G			18.0				±0.21	CO 7282 A	C 0560 G	56.0	±0.51	
CO 7233 A	B 0190 G			19.0				±0.22	CO 7283 A	C 0580 G	58.0	±0.52	
CO 7234 A	B 0200 G			20.0				±0.22	CO 7284 A	C 0600 G	60.0	±0.54	
CO 7235 A	B 0212 G			21.2				±0.23	CO 7285 A	C 0615 G	61.5	±0.55	
CO 7236 A	B 0224 G			22.4				±0.24	CO 7286 A	C 0630 G	63.0	±0.56	
CO 7237 A	B 0236 G			23.6				±0.24	CO 7287 A	C 0650 G	65.0	±0.58	
CO 7238 A	B 0250 G			25.0				±0.25	CO 7288 A	C 0670 G	67.0	±0.59	
CO 7239 A	B 0258 G			25.8				±0.26	CO 7289 A	C 0690 G	69.0	±0.61	
CO 7240 A	B 0265 G			26.5				±0.26	CO 7290 A	C 0710 G	71.0	±0.63	
CO 7241 A	B 0280 G			28.0				±0.28	CO 7291 A	C 0730 G	73.0	±0.64	

■ご注文の際には、①(旧)ISO呼び番号と②NOK部品番号を
合わせてご指定ください。

例1) 内径31.5 太さ2.65 NBR-70-1材を購入したい場合
・(旧)ISO呼び番号: B 0315 G
・NOK部品番号: CO 7243 A

※製品はJIS規格のISOシリーズと合致していますが、呼び番号に
旧JIS規格(JIS B 2401: 1996)のISOシリーズを適用しています。


(単位: mm)

NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法					NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法				
		太さ W		内径 d ₀		バリ寸法 f			太さ W		内径 d ₀		バリ寸法 f
CO 7292 A	C 0750 G	3.55	±0.10	75.0	±0.66	0.14以下	CO 7341 A	D 0615 G	5.30	±0.13	61.5	±0.55	0.16以下
CO 7293 A	C 0775 G			77.5	±0.67		CO 7342 A	D 0630 G			63.0	±0.56	
CO 7294 A	C 0800 G			80.0	±0.69		CO 7343 A	D 0650 G			65.0	±0.58	
CO 7295 A	C 0825 G			82.5	±0.71		CO 7344 A	D 0670 G			67.0	±0.59	
CO 7296 A	C 0850 G			85.0	±0.73		CO 7345 A	D 0690 G			69.0	±0.61	
CO 7297 A	C 0875 G			87.5	±0.75		CO 7346 A	D 0710 G			71.0	±0.63	
CO 7298 A	C 0900 G			90.0	±0.77		CO 7347 A	D 0730 G			73.0	±0.64	
CO 7299 A	C 0925 G			92.5	±0.79		CO 7348 A	D 0750 G			75.0	±0.66	
CO 7300 A	C 0950 G			95.0	±0.81		CO 7349 A	D 0775 G			77.5	±0.67	
CO 7301 A	C 0975 G			97.5	±0.83		CO 7350 A	D 0800 G			80.0	±0.69	
CO 7302 A	C 1000 G			100	±0.84		CO 7351 A	D 0825 G			82.5	±0.71	
CO 7303 A	C 1030 G			103	±0.87		CO 7352 A	D 0850 G			85.0	±0.73	
CO 7304 A	C 1060 G			106	±0.89		CO 7353 A	D 0875 G			87.5	±0.75	
CO 7305 A	C 1090 G			109	±0.91		CO 7354 A	D 0900 G			90.0	±0.77	
CO 7306 A	C 1120 G			112	±0.93		CO 7355 A	D 0925 G			92.5	±0.79	
CO 7307 A	C 1150 G			115	±0.95		CO 7356 A	D 0950 G			95.0	±0.81	
CO 7308 A	C 1180 G			118	±0.97		CO 7357 A	D 0975 G			97.5	±0.83	
CO 7309 A	C 1220 G			122	±1.00		CO 7358 A	D 1000 G			100	±0.84	
CO 7310 A	C 1250 G			125	±1.03		CO 7359 A	D 1030 G			103	±0.87	
CO 7311 A	C 1280 G			128	±1.05		CO 7360 A	D 1060 G			106	±0.89	
CO 7312 A	C 1320 G			132	±1.08		CO 7361 A	D 1090 G			109	±0.91	
CO 7313 A	C 1360 G			136	±1.10		CO 7362 A	D 1120 G			112	±0.93	
CO 7314 A	C 1400 G			140	±1.13		CO 7363 A	D 1150 G			115	±0.95	
CO 7315 A	C 1450 G			145	±1.17		CO 7364 A	D 1180 G			118	±0.97	
CO 7316 A	C 1500 G			150	±1.20		CO 7365 A	D 1220 G			122	±1.00	
CO 7317 A	C 1550 G	5.30	±0.13	155	±1.24	0.16以下	CO 7366 A	D 1250 G			125	±1.03	
CO 7318 A	C 1600 G			160	±1.27		CO 7367 A	D 1280 G			128	±1.05	
CO 7319 A	C 1650 G			165	±1.31		CO 7368 A	D 1320 G			132	±1.08	
CO 7320 A	C 1700 G			170	±1.34		CO 7369 A	D 1360 G			136	±1.10	
CO 7321 A	C 1750 G			175	±1.38		CO 7370 A	D 1400 G			140	±1.13	
CO 7322 A	C 1800 G			180	±1.41		CO 7371 A	D 1450 G			145	±1.17	
CO 7323 A	C 1850 G			185	±1.44		CO 7372 A	D 1500 G			150	±1.20	
CO 7324 A	C 1900 G			190	±1.48		CO 7373 A	D 1550 G			155	±1.24	
CO 7325 A	C 1950 G			195	±1.51		CO 7374 A	D 1600 G			160	±1.27	
CO 7326 A	C 2000 G			200	±1.55		CO 7375 A	D 1650 G			165	±1.31	
CO 7327 A	D 0400 G			40.0	±0.38		CO 7376 A	D 1700 G			170	±1.34	
CO 7328 A	D 0412 G			41.2	±0.39		CO 7377 A	D 1750 G			175	±1.38	
CO 7329 A	D 0425 G			42.5	±0.40		CO 7378 A	D 1800 G			180	±1.41	
CO 7330 A	D 0437 G			43.7	±0.41		CO 7379 A	D 1850 G			185	±1.44	
CO 4643 A	D 0450 G			45.0	±0.42		CO 7380 A	D 1900 G			190	±1.48	
CO 7331 A	D 0462 G			46.2	±0.43		CO 7381 A	D 1950 G			195	±1.51	
CO 7332 A	D 0475 G			47.5	±0.44		CO 7382 A	D 2000 G			200	±1.55	
CO 7333 A	D 0487 G			48.7	±0.45		CO 7383 A	D 2060 G			206	±1.59	
CO 7334 A	D 0500 G			50.0	±0.46		CO 7384 A	D 2120 G			212	±1.63	
CO 7335 A	D 0515 G			51.5	±0.47		CO 7385 A	D 2180 G			218	±1.67	
CO 7336 A	D 0530 G			53.0	±0.48		CO 7386 A	D 2240 G			224	±1.71	
CO 7337 A	D 0545 G			54.5	±0.50		CO 7387 A	D 2300 G			230	±1.75	
CO 7338 A	D 0560 G			56.0	±0.51		CO 7388 A	D 2360 G			236	±1.79	
CO 7339 A	D 0580 G			58.0	±0.52		CO 7389 A	D 2430 G			243	±1.83	
CO 7340 A	D 0600 G			60.0	±0.54		CO 7390 A	D 2500 G			250	±1.88	

ISO相当 一般工業用シリーズ (固定用)

材料	JIS記号	NBR-70-1
	旧JIS記号*	1種A
	NOK記号	A305

*旧JIS: JIS B 2401-2005

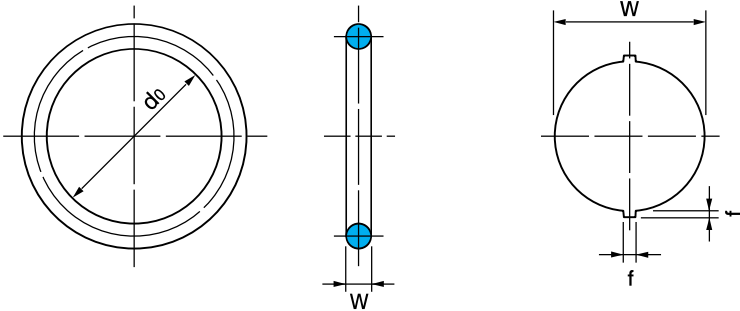

(単位: mm)

NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法					NOK 部品番号	(旧)ISO 呼び番号	Oリングの寸法				
		太さ W		内 径 d ₀		バリ寸法 f			太さ W		内 径 d ₀		バリ寸法 f
CO 7391 A	D 2580 G	5.30	±0.13	258	±1.93	0.16以下	CO 7441 A	E 2900 G	7.00	±0.15	290	±2.14	0.18以下
CO 7392 A	D 2650 G			265	±1.98		CO 7442 A	E 3000 G			300	±2.21	
CO 7393 A	D 2720 G			272	±2.02		CO 7443 A	E 3070 G			307	±2.25	
CO 7394 A	D 2800 G			280	±2.08		CO 7444 A	E 3150 G			315	±2.30	
CO 7395 A	D 2900 G			290	±2.14		CO 7445 A	E 3250 G			325	±2.37	
CO 7396 A	D 3000 G			300	±2.21		CO 7446 A	E 3350 G			335	±2.43	
CO 7397 A	D 3070 G			307	±2.25		CO 7447 A	E 3450 G			345	±2.49	
CO 7398 A	D 3150 G			315	±2.30		CO 7448 A	E 3550 G			355	±2.56	
CO 7399 A	D 3250 G			325	±2.37		CO 7449 A	E 3650 G			365	±2.63	
CO 7400 A	D 3350 G			335	±2.43		CO 7450 A	E 3750 G			375	±2.68	
CO 7401 A	D 3450 G	7.00	±0.15	345	±2.49	CO 7451 A	E 3870 G	387	±2.76	0.18以下			
CO 7402 A	D 3550 G			355	±2.56	CO 7452 A	E 4000 G	400	±2.84				
CO 7403 A	D 3650 G			365	±2.62	CO 7453 A	E 4120 G	412	±2.91				
CO 7404 A	D 3750 G			375	±2.68	CO 7454 A	E 4250 G	425	±2.99				
CO 7405 A	D 3870 G			387	±2.76	CO 7455 A	E 4370 G	437	±3.07				
CO 7406 A	D 4000 G			400	±2.84	CO 7456 A	E 4500 G	450	±3.15				
CO 7407 A	E 1090 G			109	±0.91	CO 6711 A	E 4620 G	462	±3.22				
CO 7408 A	E 1120 G			112	±0.93	CO 7457 A	E 4750 G	475	±3.30				
CO 7409 A	E 1150 G			115	±0.95	CO 7458 A	E 4870 G	487	±3.37				
CO 7410 A	E 1180 G			118	±0.97	CO 7459 A	E 5000 G	500	±3.45				
CO 7411 A	E 1220 G	7.00	±0.15	122	±1.00	CO 7460 A	E 5150 G	515	±3.54	0.18以下			
CO 7412 A	E 1250 G			125	±1.03	CO 7461 A	E 5300 G	530	±3.63				
CO 7413 A	E 1280 G			128	±1.05	CO 7462 A	E 5450 G	545	±3.72				
CO 7414 A	E 1320 G			132	±1.08	CO 7463 A	E 5600 G	560	±3.81				
CO 7415 A	E 1360 G			136	±1.10	CO 7464 A	E 5800 G	580	±3.93				
CO 7416 A	E 1400 G			140	±1.13	CO 7465 A	E 6000 G	600	±4.05				
CO 7417 A	E 1450 G			145	±1.17	CO 7466 A	E 6150 G	615	±4.13				
CO 7418 A	E 1500 G			150	±1.20	CO 7467 A	E 6300 G	630	±4.22				
CO 7419 A	E 1550 G			155	±1.24	CO 7468 A	E 6500 G	650	±4.34				
CO 7420 A	E 1600 G			160	±1.27	CO 7469 A	E 6700 G	670	±4.46				
CO 7421 A	E 1650 G	7.00	±0.15	165	±1.31	■ご注文の際には、①(旧)ISO呼び番号と②NOK部品番号を 合わせてご指定ください。 例1) 内径400 太さ5.30 NBR-70-1材を購入したい場合 ・(旧)ISO呼び番号: D 4000 G ・NOK部品番号: CO 7406 A							
CO 7422 A	E 1700 G			170	±1.34								
CO 7423 A	E 1750 G			175	±1.38	※製品はJIS規格のISOシリーズと合致していますが、呼び番号に 旧JIS規格(JIS B 2401: 1996)のISOシリーズを適用しています。							
CO 7424 A	E 1800 G			180	±1.41								
CO 7425 A	E 1850 G			185	±1.44								
CO 7426 A	E 1900 G			190	±1.48								
CO 7427 A	E 1950 G			195	±1.51								
CO 7428 A	E 2000 G			200	±1.55								
CO 7429 A	E 2060 G			206	±1.59								
CO 7430 A	E 2120 G			212	±1.63								
CO 7431 A	E 2180 G	218	±1.67										
CO 7432 A	E 2240 G	7.00	±0.15	224	±1.71	0.18以下							
CO 7433 A	E 2300 G			230	±1.75								
CO 7434 A	E 2360 G			236	±1.79								
CO 7435 A	E 2430 G			243	±1.83								
CO 7436 A	E 2500 G			250	±1.88								
CO 7437 A	E 2580 G	7.00	±0.15	258	±1.93	0.18以下							
CO 7438 A	E 2650 G			265	±1.98								
CO 7439 A	E 2720 G			272	±2.02								
CO 7440 A	E 2800 G			280	±2.08								

