



NOK SSシリーズ (固定用)

材料 (NOK記号) A305 F201

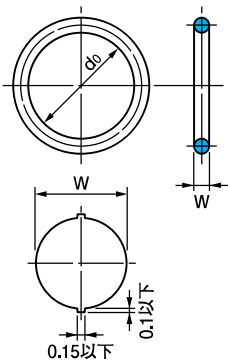


Oリング寸法

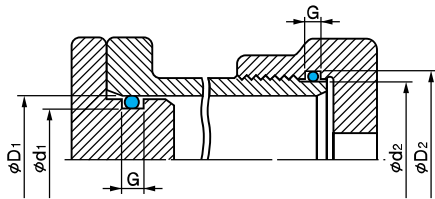


(はみ出しすぎま P15 図1-3 参照)

円筒面固定用




(注) 面取り部仕上げは、NOK推奨値です。

溝形状



外圧用



内圧用

平面固定用

(単位: mm)

N O K 部 品 番 号			N O K 呼 び 番 号	O リ ン グ の 寸 法				み ぞ 部 の 寸 法						
種 類 寸法コード	材 料 コード			太 さ W	内 径 d ₀	内径d ₀ の許容差		d ₁ ⁰ _{-0.05}	d ₂ ⁰ _{-0.05}	D ₁ ^{+0.05} ₀	D ₂ ^{+0.05} ₀	D ₃ ^{+0.05} ₀	G ^{+0.15} ₀	H ^{+0.05} ₀
	A305	F201				A305	F201							
CO 3325	A	N0	SS 2	1.0±0.07	1.8	±0.15	±0.20	2.0	1.9	3.3	3.3	3.7	1.5	0.7
CO 2956		N1	SS 2.5		2.0			2.5	2.1	3.8	3.5	3.9		
CO 3700		G0	SS 3		2.5			3.0	2.6	4.3	4.0	4.3		
CO 3835		N0	SS 3.5		3.0			3.5	3.1	4.8	4.5	4.7		
DO 1127		G0	SS 4		3.5			4.0	3.6	5.3	5.0	5.1		
CO 7820		N0	SS 4.5		4.0			4.5	4.1	5.8	5.5	5.5		
CO 3729		N0	SS 5		4.5			5.0	4.6	6.3	6.0	6.0		
CO 3370		H0	SS 5.5		5.0			5.5	5.1	6.8	6.5	6.5		
CO 3765		N0	SS 6		5.5			6.0	5.6	7.3	7.0	7.0		
CO 3216		H0	SS 6.5		6.0			6.5	6.1	7.8	7.5	7.5		
CO 8846		G0	SS 7		6.5			7.0	6.6	8.3	8.0	8.0		
CO 5497		G0	SS 7.5		7.0			7.5	7.1	8.8	8.5	8.5		
CO 4275		P0	SS 8		7.5			8.0	7.6	9.3	9.0	9.0		
CO 7044		H0	SS 8.5		8.0			8.5	8.1	9.8	9.5	9.5		
CO 4945		G0	SS 9		8.5			9.0	8.6	10.3	10.0	10.0		
CO 7949		G0	SS 9.5		9.0			9.5	9.1	10.8	10.5	10.5		
CO 8847		G0	SS 10		9.5			10.0	9.6	11.3	11.0	11.0		
CO 8848		G0	SS 10.5		10.0			10.5	10.1	11.8	11.5	11.5		
CO 8849		G0	SS 11		10.5			11.0	10.6	12.3	12.0	12.0		
CO 5952		H0	SS 11.5		11.0			11.5	11.1	12.8	12.5	12.5		
CO 8850	G0	SS 12		11.5		12.0	11.6	13.3	13.0	13.0				
NOK SSシリーズは、機器の小型化のご要望に応じて、特に小径のOリングをシリーズ化したものです。 ■ご注文の際には、NOK部品番号をご指定ください。 例1) 内径11.5 太さ1.0 A305を購入したい場合 ・NOK部品番号：<u>CO 8850 A</u> 														

SSシリーズ