




THIN SHEET NUT-INSERT

JAH SERIES

- Half-Hex Type

Material: Low Carbon Steel

Finish: Zinc Clear Plating Cr3+

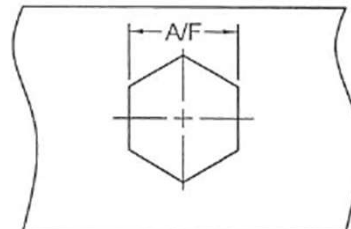

Unit: mm

ITEM NO.	THREAD SIZE	GRIP RANGE	HEX HOLE A/F (+0.1)	D Max.	H ±0.35 *±0.40	T ±0.15 *±0.20	L ±0.40
JAH M4	M4x0.7	0.5~2.0	6.35	6.35	9.50	0.70	9.80
JAH M4-L		2.0~3.3	6.35	6.35	9.50	0.70	11.10
JAH M5	M5x0.8	0.5~3.3	7.15	7.10	9.90	0.70	11.10
JAH M5-L		3.3~5.7	7.15	7.10	9.90	0.70	13.60
JAH M6	M6x1.0	0.7~4.2	9.50	9.50	12.95	0.75	14.86
JAH M6-L		4.2~6.6	9.50	9.50	12.95	0.75	17.40
JAH M8	M8x1.25	0.7~3.8	12.70	12.70	16.65	0.90	17.40
JAH M8-L		3.8~7.9	12.70	12.70	16.65	0.90	21.46
JAH M10	M10x1.5	0.7~3.8	12.70	12.70	16.65	0.90	17.40
JAH M10-L		3.8~7.9	12.70	12.70	16.65	0.90	21.46
JAH 6-32	6-32	0.5~2.0	6.35	6.35	9.50	0.70	9.80
JAH 8-32	8-32						
JAH 10-24	10-24	0.5~3.3	7.15	7.10	9.90	0.70	11.10
JAH 10-32	10-32						
JAH 10-32-L	10-32	3.3~5.7	7.15	7.10	9.90	0.70	13.60
JAH 1/4-20	1/4-20	0.7~4.2	9.50	9.50	12.95	0.75	14.86
JAH 1/4-20-L		4.2~6.6	9.50	9.50	12.95	0.75	17.40
JAH 5/16-18	5/16-18	0.7~3.8	12.70	12.70	16.65	0.90	17.40
JAH 5/16-18-L		3.8~7.9	12.70	12.70	16.65	0.90	21.46
JAH 3/8-16	3/8-16	0.7~3.8	12.70	12.70	16.65	0.90	17.40
JAH 3/8-16-L		3.8~7.9	12.70	12.70	16.65	0.90	21.46
**JAH 1/2-13	1/2-13	1.6~5.1	17.45	17.45	*22.50	*1.10	30.80

** MOQ is required.

EDC 金開股份有限公司 Energetic Development Corp.

Head office: 5F, No. 1, Lane 50, Sec. 3, Nan Kang Rd., Taipei 115, Taiwan

Tel: (02) 27881122 Fax: (02) 27881480 Website: www.edccorp.com.tw Email: edc@edccp.com