


THIN SHEET NUT-INSERT

JAK SERIES

- Knurled Body

Material: Low Carbon Steel
Finish: Zinc Clear Plating Cr3+

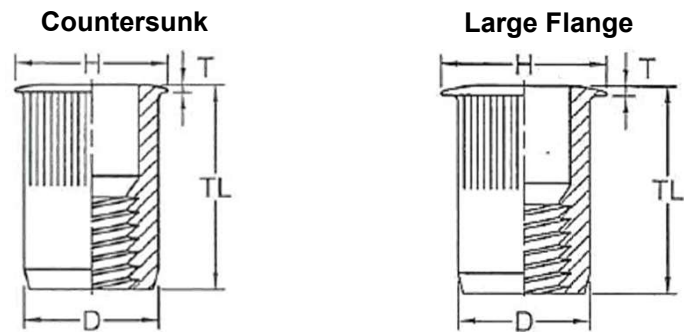

▼COUNTERSUNK

Unit: mm

ITEM NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE +0.1	D +0.05/-0.15	H ±0.30	T ±0.1	TL ±0.40
JAK SM4	M4x0.7	0.5~2.0	6.75	6.70	7.85	0.50	11.10
JAK SM4-L		2.0~3.3					12.40
JAK SM5	M5x0.8	0.5~3.3	7.60	7.50	8.65	0.50	12.50
JAK SM5-L		3.3~5.7					15.30
JAK SM6	M6x1.0	0.7~4.2	10.00	9.90	11.60	0.55	15.30
JAK SM6-L		4.2~6.6					17.80
JAK SM8	M8x1.25	0.7~3.8	13.50	13.45	15.10	0.55	18.00
JAK SM8-L		3.8~7.9					21.00
JAK SM10	M10x1.50	0.7~3.8	13.50	13.45	15.10	0.55	18.00
JAK SM10-L		3.8~7.9					21.00

▼LARGE FLANGE

Unit: mm

ITEM NO.	THREAD SIZE	GRIP RANGE	HOLE SIZE +0.1	D +0.05/-0.15 *0.15	H ±0.30 *±0.64	T ±0.1	TL ±0.40
JAK LM4	M4x0.7	0.5~2.0	6.75	6.70	9.90	0.75	11.45
JAK LM4-L		2.0~3.3					12.70
JAK LM5	M5x0.8	0.5~3.3	7.60	7.50	10.55	0.75	12.85
JAK LM5-L		3.3~5.7					15.50
JAK LM6	M6x1.0	0.7~4.2	10.00	9.90	12.70	0.75	15.50
JAK LM6-L		4.2~6.6					18.00
JAK LM8	M8x1.25	0.7~3.8	13.50	13.45	*17.40	0.90	18.40
JAK LM8-L		3.8~7.9					21.35
JAK LM10	M10x1.50	0.7~3.8	13.50	13.45	*17.40	0.90	18.40
JAK LM10-L		3.8~7.9					21.35
*JAK LM12	M12x1.75	1.6~5.1	17.45	*17.40	22.00	1.20	30.40
*JAK LM12-L		5.1~8.9					34.20
*JAK LMTZ-2L		8.9~12.7					38.00

**MOQ is required.

**Material in aluminum alloy is available with MOQ.

EDC 金開股份有限公司 Energetic Development Corp.

Head office: 5F, No. 1, Lane 50, Sec. 3, Nan Kang Rd., Taipei 115, Taiwan

Tel: (02) 27881122 Fax: (02) 27881480 Website: www.edccorp.com.tw Email: edc@edccp.com