


RUBBER NUT-INSERT

RUBBER SERIES

Material: Rubber Nut/ Brass Insert
(EPDM, Neoprene, or NBR)

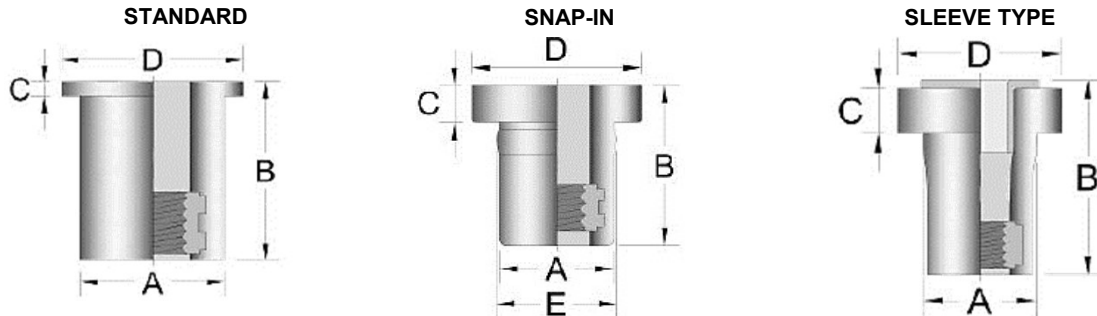

Unit: mm

ITEM NO.	THREAD SIZE		HOLE SIZE	GRIP RANGE	A	B	C	D	E	Tightening Torque (Kgf/cm)	Hardness (±5)
	Inch	Metric									
STANDARD TYPE											
E079-0310	6-32	M3x0.5	8.00	0.4~4.0	7.90	12.60	1.20	11.00	-	2.5~5.0	60
E061-0325	6-32	M3x0.5	6.20	9.5~13.0	6.10	24.90	0.90	14.00	-	2.5~5.0	70
E079-0410	8-32	M4x0.7	8.00	0.4~4.0	7.90	12.60	1.20	11.00	-	2.5~4.0	70
E079-0414	8-32	M4x0.7	8.00	0.4~4.4	7.90	14.20	1.50	19.05	-	2.5~4.0	70
E096-0515	10-32	M5x0.8	9.70	0.4~4.9	9.60	14.10	0.90	12.70	-	3.5~5.0	60
E096-0517	10-32	M5x0.8	9.70	0.85~5.9	9.60	17.00	1.00	14.00	-	3.0~7.0	60
E096-0518	10-32	M5x0.8	9.70	0.8~5.8	9.60	18.00	2.00	19.00	-	3.0~7.0	60
E096-0519	10-32	M5x0.8	9.70	0.8~5.8	9.60	20.95	4.70	18.95	-	4.0~7.0	60
E096-5192	10-24	M5x0.8	9.70	0.8~5.8	9.60	19.50	4.70	14.00	-	4.0~7.0	60
E096-0520	10-32	M5x0.8	9.70	4.0~10.0	9.60	21.50	0.90	14.00	-	3.0~9.0	60
E096-0525	10-32	M5x0.8	9.70	7.9~15.0	9.60	26.50	1.30	14.00	-	3.0~7.0	60
E096-0540	10-32	M5x0.8	9.70	20.5~30.0	9.60	39.00	1.30	14.00	-	6.0~10.0	60
E127-0615	1/4-20	M6x1.0	12.80	0.4~4.0	12.70	16.00	1.30	16.00	-	6.0~10.0	60
E127-0616	1/4-20	M6x1.0	12.80	0.4~4.0	12.70	16.00	1.30	20.00	-	6.0~10.0	60
E127-0619	1/4-20	M6x1.0	12.80	4.7~8.7	12.70	20.30	1.30	16.00	-	6.0~10.0	70
E127-0620	1/4-20	M6x1.0	12.80	0.8~4.7	12.70	21.10	4.75	19.05	-	8.0~10.0	70
E127-0625	1/4-20	M6x1.0	12.80	6.4~11.5	12.70	26.70	2.00	16.30	-	8.0~10.0	70
E159-0820	5/16-18	M8x1.25	16.00	0.4~4.0	15.90	18.30	3.20	21.50	-	10.0~15.0	60
E159-0825	5/16-18	M8x1.25	16.00	3.95~9.5	15.90	27.90	5.70	21.50	-	10.0~16.0	60
**E159-0827	5/16-18	M8x1.25	19.15	0.38~11.10	19.05	27.00	4.75	31.75	-	45.0~55.0	60
**E200-1024	3/8-16	M10x1.5	20.10	2.5~3.5	20.00	24.00	3.00	25.00	-	45.0~55.0	60
E190-1027	3/8-16	M10x1.5	19.15	0.38~11.10	19.05	27.00	4.75	29.50	-	45.0~55.0	60
**E190-1027A	3/8-16	M10x1.5	19.15	0.38~11.10	19.05	27.00	4.75	31.75	-	45.0~55.0	60
**E240-1226	1/2-13	M12x1.75	24.10	2.5~3.5	24.00	26.50	3.00	27.00	-	60.0~70.0	60
SNAP-IN TYPE											
E079-0411D	8-32	M4x0.7	8.00	0.4~1.3	7.90	11.00	1.30	12.70	9.30	3.5~5.0	70
E096-0511D	10-32	M5x0.8	9.70	0.5~1.5	9.60	11.00	1.50	12.70	10.25	3.5~5.0	70
E096-0514D	10-24	M5x0.8	9.70	0.4~1.3	9.60	14.00	3.20	14.20	10.25	3.5~5.0	65
SLEEVE TYPE											
**PF-4150	8-32	M4x0.7	8.50	0.5~2.0	8.40	15.00	3.50	12.50	-	1.0~1.5	50

** MOQ is required.

EDC 金開股份有限公司 Energetic Development Corp.

Head office: 5F, No. 1, Lane 50, Sec. 3, Nan Kang Rd., Taipei 115, Taiwan

Tel: (02) 27881122 Fax: (02) 27881480 Website: www.edccorp.com.tw Email: edc@edccp.com